



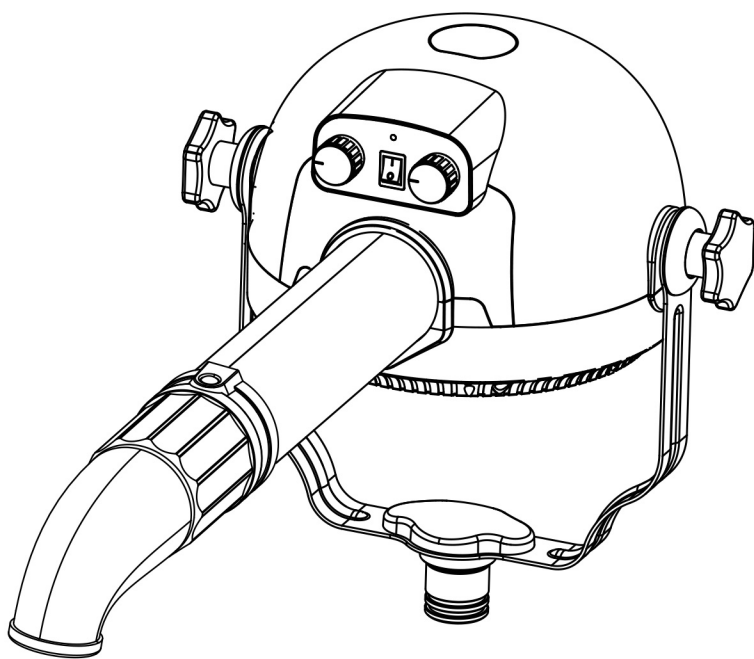

GWPSD-920P	Stand Dryer
GWPWD-921P	Wall-mount Dryer



TECHNICAL SPECIFICATIONS	
Model	GWPSD-920P / GWPWD-921P
Rated Voltage	AC 220~240 V~
Rated Frequency	50~60 Hz
Rated Power	1800 W
Protection Class	Class II 
Maximum Air Speed	20.5 m/s
Air Volume	6.9 m³/min
Maximum Air Temperature	Ambient Temperature +60°C (140°F)
Motor Service Life	≥5,000 hours
Maximum Sound Pressure Level	< 70 dB(A)

The appliance must be connected to an electrical supply capable of providing the minimum circuit current shown below.

Supply Voltage	Minimum Circuit Current Required
AC 220–240 V~ 50–60 Hz	Not less than 10 A
AC 110–127 V~ 60 Hz	Not less than 15 A

Note: Use a dedicated electrical circuit. Do not share the circuit with other high-power appliances.

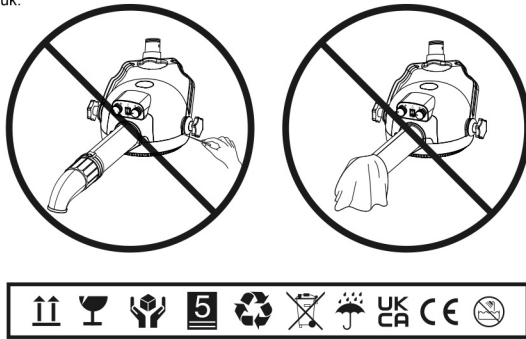


Diagram illustrating the assembly of the Drying Unit onto the Stand Column. The components shown include:

- Drying Unit
- Air Outlet Tube
- Mounting Collar
- Locking Screw
- Telescopic Column
- Height Adjustment Knob
- Stand Column
- Power Cord
- Castor Wheel
- Metal Support
- Rubber Wash
- Fixing Bolt

Important Notes:

- IMPORTANT:** Ensure the locking screw is installed correctly. Failure to do so may result in damage to the unit.
- Before Use:**
 - Ensure the unit is properly assembled.
 - Tighten the locking screw.
 - Check the power cord.
 - Ensure the unit is properly grounded.
 - Verify the unit is properly calibrated.