GROOMERS WORLD

ELECTRIC LIFTING GROOMING TABLE

USER MANUAL

FT-899

PROFESSIONAL GROOMING EQUIPMENT

www.groomersworld.co.uk

PARTS & ACCESSORIES

1 Non-Slip Tabletop × 1

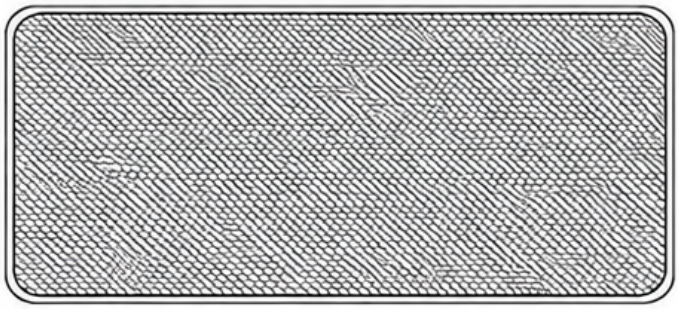

2 Grooming Table Frame × 1

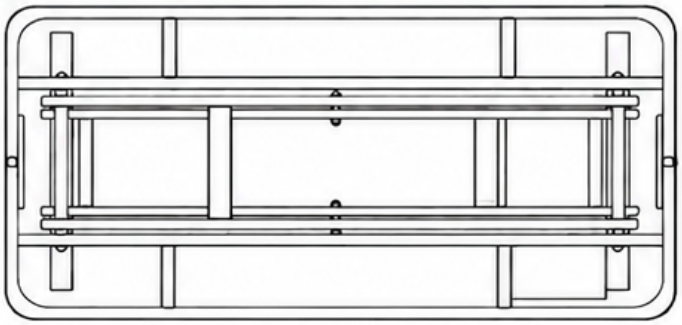

3 Overhead Grooming Arm Set × 1

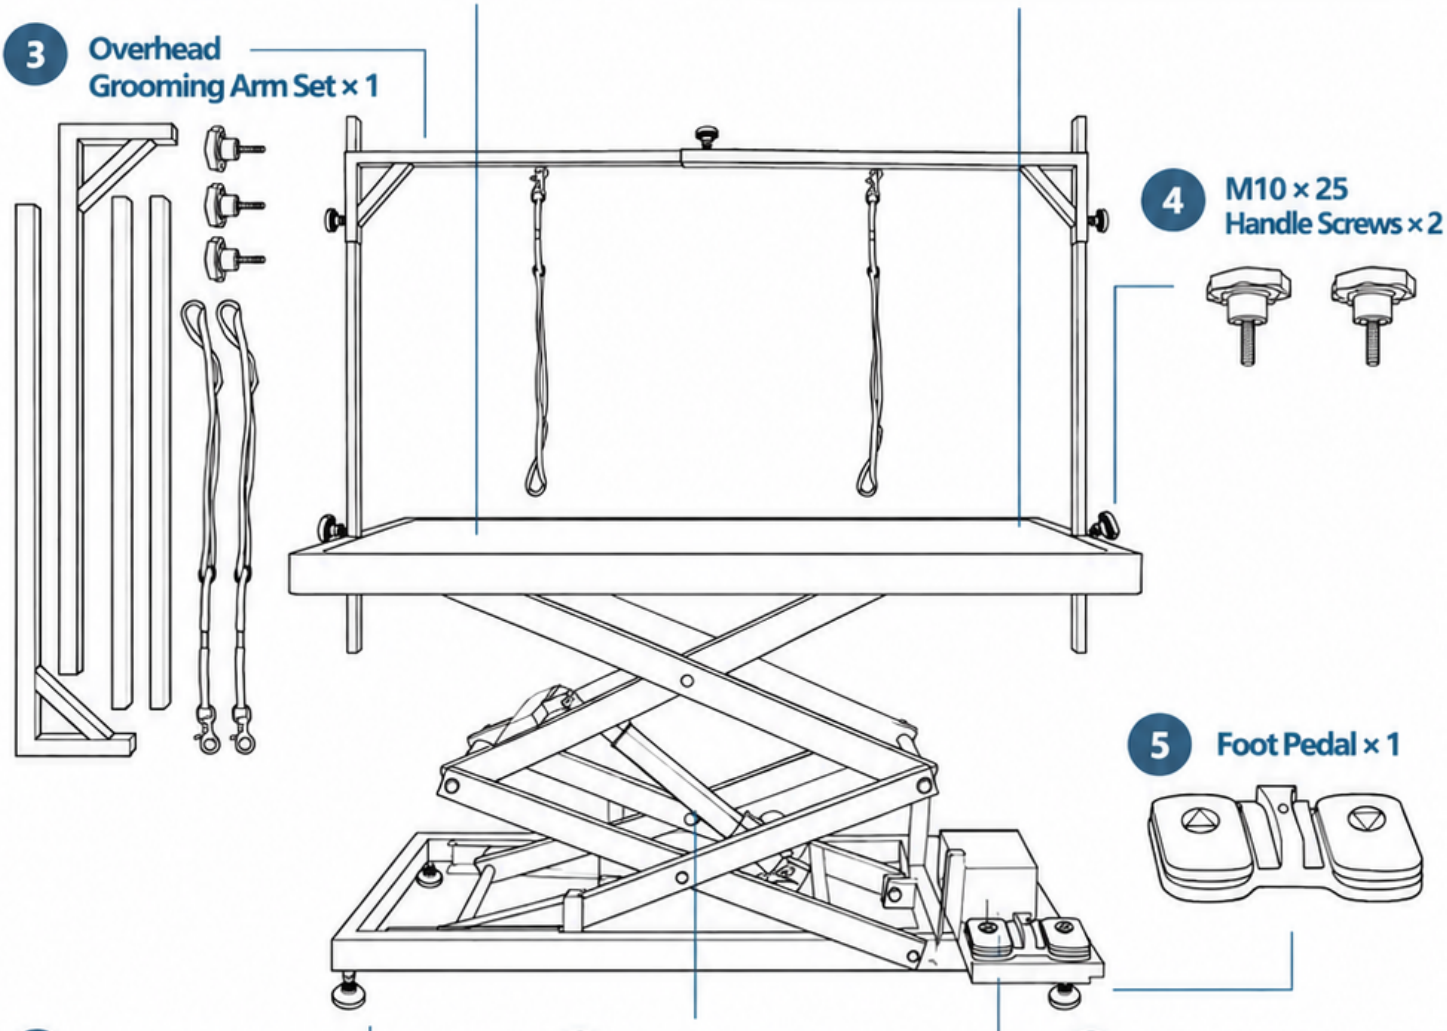

4 M10 × 25 Handle Screws × 2

5 Foot Pedal × 1

6 Adjustable Feet × 4

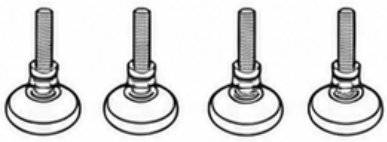

7 Linear Actuator × 1



8 Transformer × 1



GWGT-899

INSTALLATION INSTRUCTIONS

INSTALLING THE OVERHEAD GROOMING ARM

1 Adjust the width of the grooming arm

Loosen the top adjustment screw by turning it anticlockwise. Extend or retract the overhead grooming arm to match the width of the table (83–137 cm). Once adjusted, tighten the screw securely to lock the arm in position.

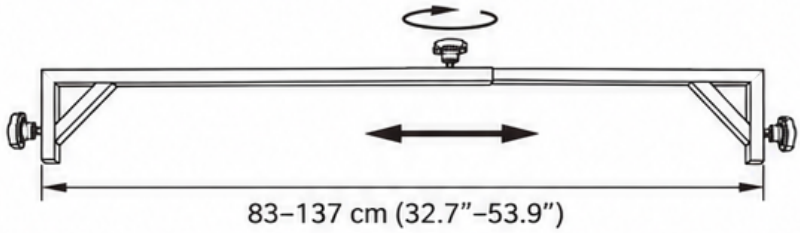

2 Adjust the height of the grooming arm

Loosen the adjustment screws on both sides of the grooming arm by turning them anticlockwise. Insert the horizontal arm assembly into the two upright supports and adjust both sides to the same height (30–90 cm). Tighten the adjustment screws securely to hold the arm in position.

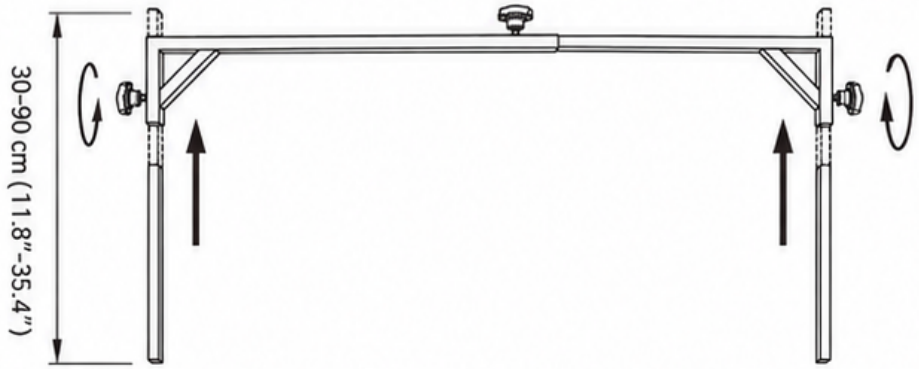

3 Secure the grooming arm to the table

Insert the two upright supports into the mounting holes on either side of the tabletop. Ensure that each support extends approximately 4–6 cm below the mounting point. Secure both supports using the two M10 × 25 handle screws provided, ensuring they are tightened firmly.

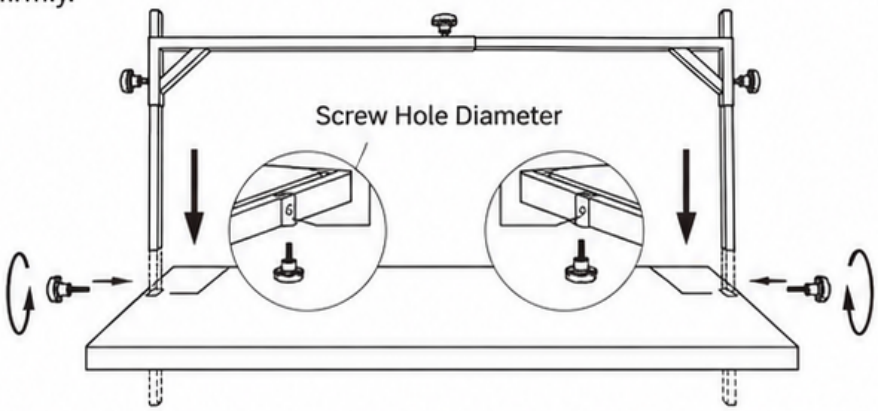

TECHNICAL SPECIFICATIONS

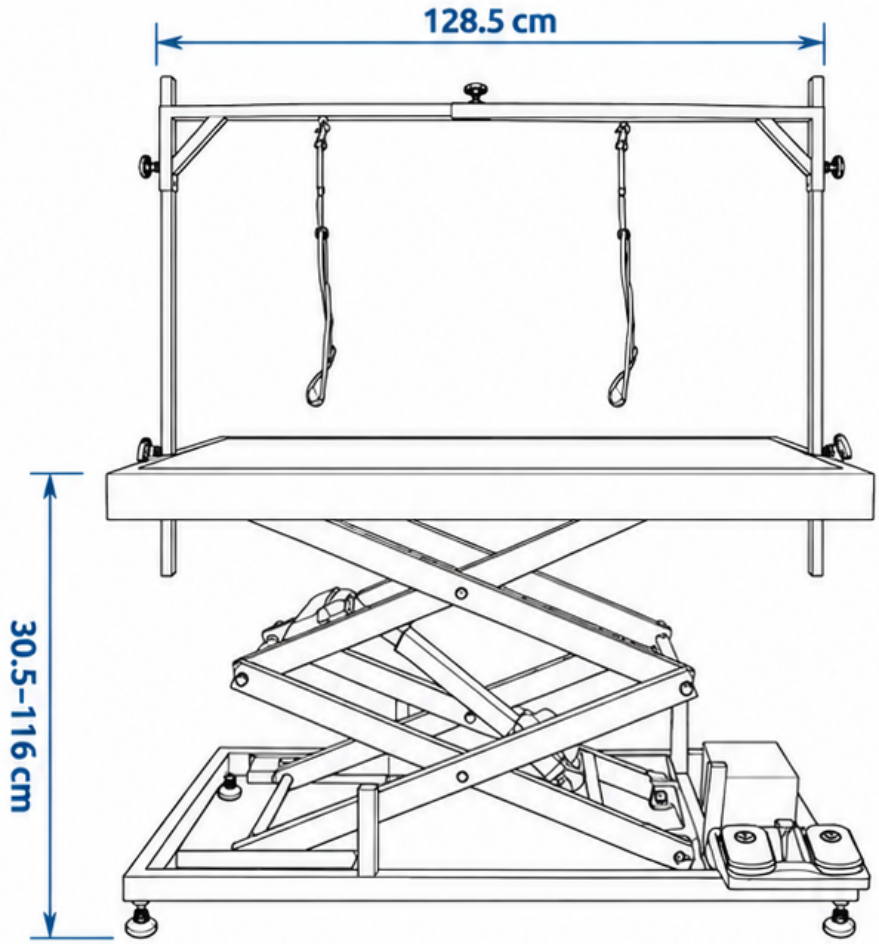

FRONT VIEW

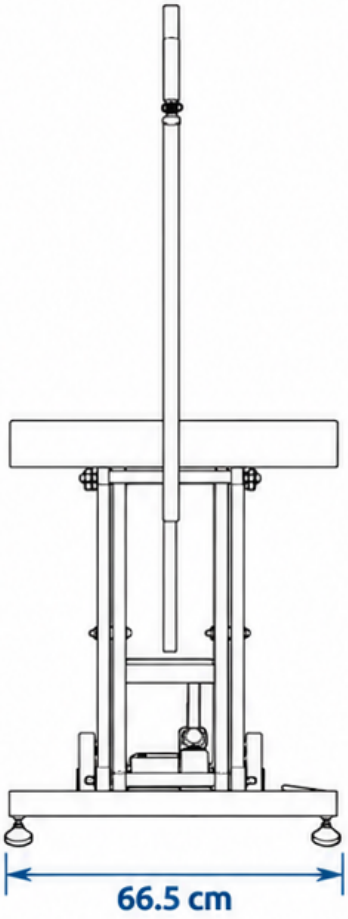

SIDE VIEW

Model: GWFT-899			
Net weight (kg)	58	Gross weight (kg)	64
Voltage	230 V ~ 50 Hz	Package volume (m^3)	0.265
Product dimensions (cm)	128.5 × 66.5 × 30.5–116	Package dimensions (cm)	131.5 × 69.5 × 29

OPERATING INSTRUCTIONS

1 ALCI Safety Protection

Maximum rated load: 3000W
Protection rating: IPX66

Press down the button to disconnect the power.

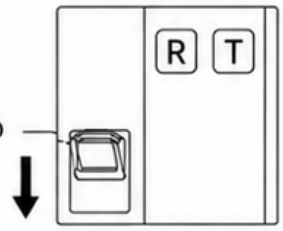

Press up the button to connect the power.

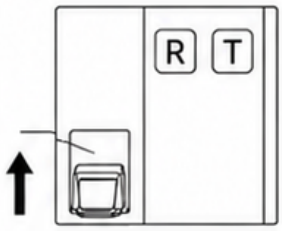

R **Reset:** Press the reset button to restore power after testing.

T **Test:** Press the test button once per month to check that the safety protection operates correctly.

IMPORTANT: If the ALCI fails to disconnect power when tested, discontinue use until the issue has been assessed.

2 Adjusting the Table Feet

Rotate the adjustable feet as required to ensure the grooming table is level and stable on the floor. All four feet should make firm contact with the ground before use.

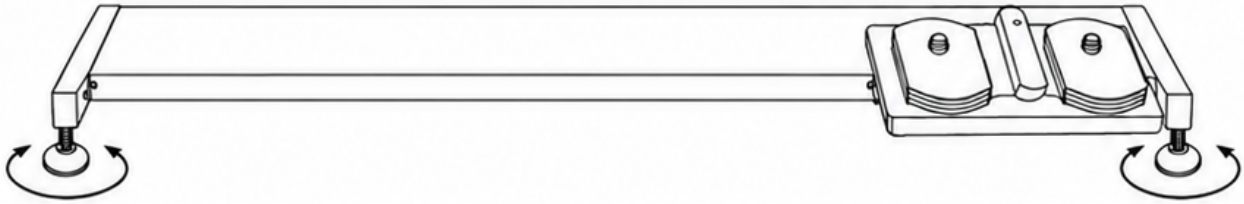

3 Foot Pedal Operation

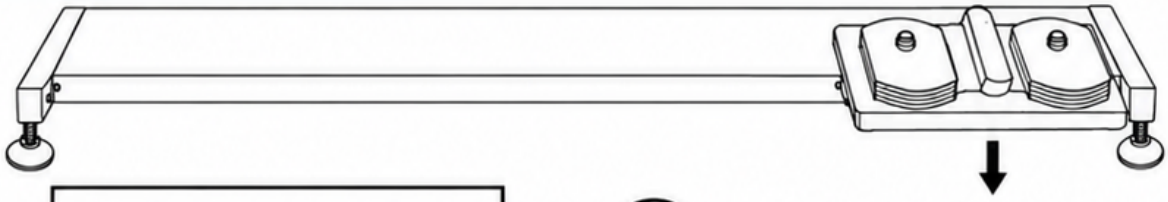

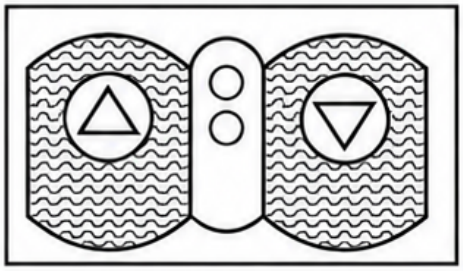

Raise the Table
Stepping on the pedal to lift up.

Lower the Table
Stepping on the pedal to go down.

SAFETY & OPERATING INSTRUCTIONS
ELECTRIC GROOMING TABLE – MODEL GWFT-899

Please read and follow these instructions carefully before using this product.
Keep this manual for future reference. Failure to follow these instructions can lead to serious injury or death, damage to the equipment or invalidate the warranty.

1 GENERAL SAFETY & OPERATION

- This appliance is intended solely for professional dog grooming. It must not be used for lifting people or for any other purpose.
- This appliance may only be operated by trained professionals aged 18 years or over. Children must not operate or play with the equipment.
- Do not exceed the maximum load capacity of **100 kg (220 lbs)** when using the table. Ensure the dog is positioned centrally at all times.
- Do not exceed a maximum load of 40 lbs (18 kg) when using the H-bar hooks to support a grooming hammock or similar restraint.
- Only one dog may be placed on the table at a time.
- Before loading, switch on the power supply and lower the table to a suitable height for safe loading. Carefully place the dog onto the table, ensure it is securely positioned and, where appropriate, restrained, before adjusting to the required working height.
- Ensure the dog remains centrally positioned on the tabletop during operation.
- Once grooming is complete, lower the table to a safe height for removal. Carefully remove the dog from the table and switch off the power supply once the desired height is reached.
- Avoid unnecessary or continuous operation of the lifting mechanism.
- Ensure the dog is kept clear of the lifting mechanism and other moving components at all times. Do not allow dogs to be beneath or near the lifting mechanism during operation.
- Ensure the unit is installed on a stable, level surface and that all components are correctly assembled prior to use.
- Ensure all electrical connections are protected by an IP66-rated socket and a suitable waterproof cover when operating.
- Keep electrical components, including plugs, sockets, controls and cables, protected from water ingress at all times. Do not allow water to come into contact with these parts.
- Do not connect the appliance to an overloaded circuit or shared outlet where this may present a risk.
- Do not allow any person to sit, stand, climb or lean on the table.
- Inspect all structural components, including welding points on the lifting frame, before each use to ensure there are no signs of damage, cracking or fatigue; do not operate the appliance if any defects are identified.
- Inspect painted surfaces regularly, and any damaged or chipped paintwork must be restored immediately to prevent corrosion.
- Always ensure the surrounding area and floor are clean, dry, well-lit and free from obstacles before use to reduce the risk of slips, trips or electrical hazards.
- Keep hands, feet and other body parts clear of moving parts, as this may result in crushing or pinching injuries.
- Never leave a dog unattended on the table and maintain supervision at all times during operation.
- Do not use the equipment if the power cable, plug, transformer, actuator or foot pedal is damaged.
- Ensure all cables are positioned safely to prevent damage, strain, tripping hazards or access by dogs.
- Do not tamper with, interfere with, or attempt to access internal electrical components. Do not insert, poke or prod objects into any openings, controls or electrical parts of the appliance.
- Do not operate the lifting mechanism continuously for more than 2 minutes. Allow a minimum rest period of 18 minutes between cycles to prevent overheating.
- Always use appropriate restraints where necessary to ensure the safety of the dog.

2 CLEANING, MAINTENANCE & FAULTS

- Disconnect the appliance from the power supply when not in use and at the end of each working day.
- Disconnect from the power supply before cleaning, inspection or maintenance.
- Clean using a dry or slightly damp cloth only. Do not use corrosive, abrasive or solvent-based cleaning agents.
- Do not use water to clean electrical components, including the controller, foot pedal or actuator, due to risk of electric shock.
- Regularly inspect the appliance to ensure it remains in safe working condition. All repairs must be approved by Groomers World.
- In the event of abnormal operation, stop use immediately, isolate the appliance from the power supply and do not attempt to repair or disassemble the unit. Contact **info@groomersworld.co.uk** for further assistance.
- Do not modify the equipment in any way. Use only Groomers World approved parts and accessories.
- Ensure all safety labels remain present, clean and clearly legible at all times; if not, contact us at **info@groomersworld.co.uk**.
- The expected service life of this appliance is 3 years under normal use and maintenance.

3 WARRANTY EXCLUSIONS

This warranty does not cover faults or damage caused by misuse, neglect, accidental damage, failure to follow instructions, unauthorised repairs or modifications, normal wear and tear, unsuitable operating conditions, improper maintenance, transportation damage after delivery, or use of non-approved parts or accessories. This warranty does not affect your statutory rights under UK consumer law.

4 LIMITATION OF LIABILITY

To the fullest extent permitted by law, the supplier shall not be liable for any indirect or consequential loss, including loss of profits, revenue, goodwill, or third-party claims. Nothing in this warranty excludes or limits liability for death or personal injury caused by negligence, fraud or fraudulent misrepresentation, or any liability that cannot be excluded under UK law.

Do not use this device in a bathtub, shower, or water-filled reservoir.
WARNING: Do not use this appliance near bathtubs, showers, basins or other vessels containing water.

This marking indicates that this product should not be disposed of with other household waste throughout the UK. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources.

For the latest product information and updated manuals, please visit: **www.groomersworld.co.uk**
For warranty support, please contact: **info@groomersworld.co.uk**

GROOMERS WORLD

PRODUCT INFORMATION & COMPLIANCE

GW Equipment Ltd

Electric Grooming Table – GWFT-899

Name	Pet Grooming Table	**Weight GW/NW**	64/58 kg
Model	GWFT-899	**Input**	230V~50Hz
Size	128.5*66.5*30.5–116H cm	**Max Power**	50W
Lifting Height	30–116cm	**Output**	24V =, Max2, 0A
Static Load	90 kg		
Lifting Weight	100 kg		

⚠ WARNING

Read and fully understand operator's manual before using this machine.

Failure to follow operating instructions could result in death or serious injury.

MADE IN CHINA

GW Equipment Ltd, Unit 11 Sunflag Business Park, Durham, DH1 1TN
Tel: 07511785417 Email: info@groomersworld.co.uk

PLEASE RETAIN THIS MANUAL FOR FUTURE REFERENCE.

The product identification label contains important model, rating and manufacturer information and must remain attached and legible.

For product support, servicing, replacement parts or safety enquiries, please contact Groomers World.

GW Equipment Ltd
Unit 11 Sunflag Business Park
Durham, DH1 1TN, United Kingdom
info@groomersworld.co.uk
www.groomersworld.co.uk