

GR**MERS**
WORLD PRO

ELECTRIC GROOMING TABLE
USER MANUAL


GWFT-818




PROFESSIONAL GROOMING EQUIPMENT
www.groomersworld.co.uk

Schematic diagram of accessories


1 Non-slip Table Top*1

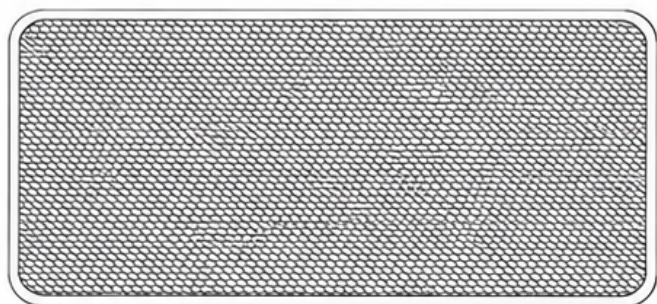


2 Grooming Table Frame*1

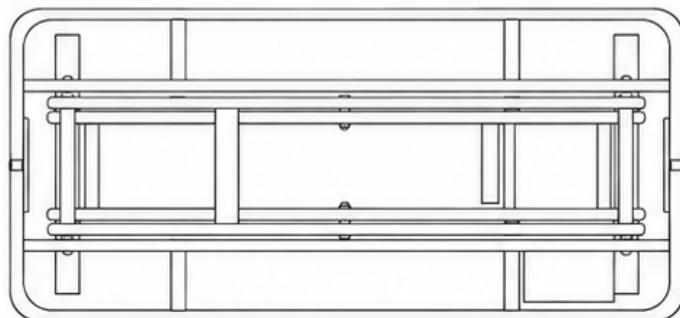

3 Over-head Grooming Arm Set*1

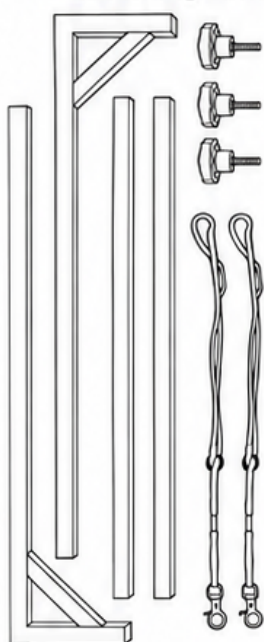


4 M10*25
Handle screw*2




5 Foot pedal




6 Adjustable feet*4



7 Linear actuator 220




8 Transformer




Installation instructions

Over-head Grooming Arm Set Installation As Below :


- 1 Loosen the screws counterclockwise. According to the width of the table, push the arm outward to the appropriate position, and then lock up the top handle screw.

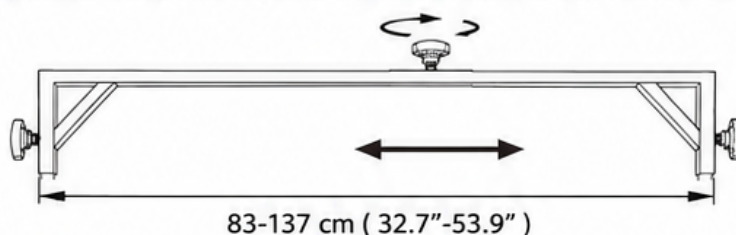

- 2 Loosen the screws on both sides of the grooming arm counterclockwise. Insert the arm into the suspension arm separately, and keep the height on both sides consistent, and then lock up the handle screws on both sides.

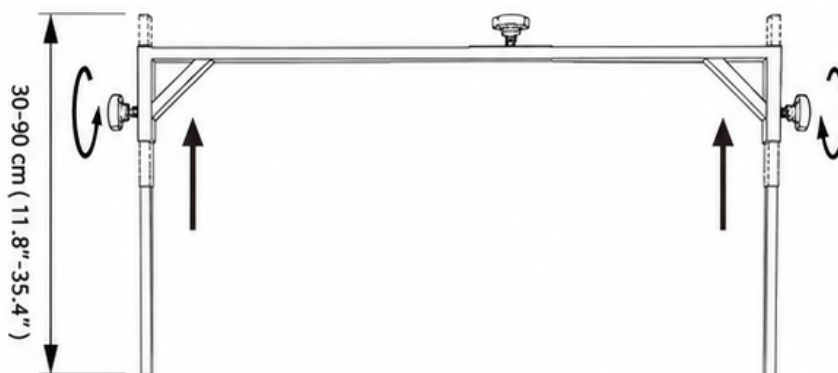


- 3 Use the over-head grooming arm set insert into the two side hole on the table, Leave a length of 4-6cm. Use M10*25 handle screws to fix the two side grooming arms.

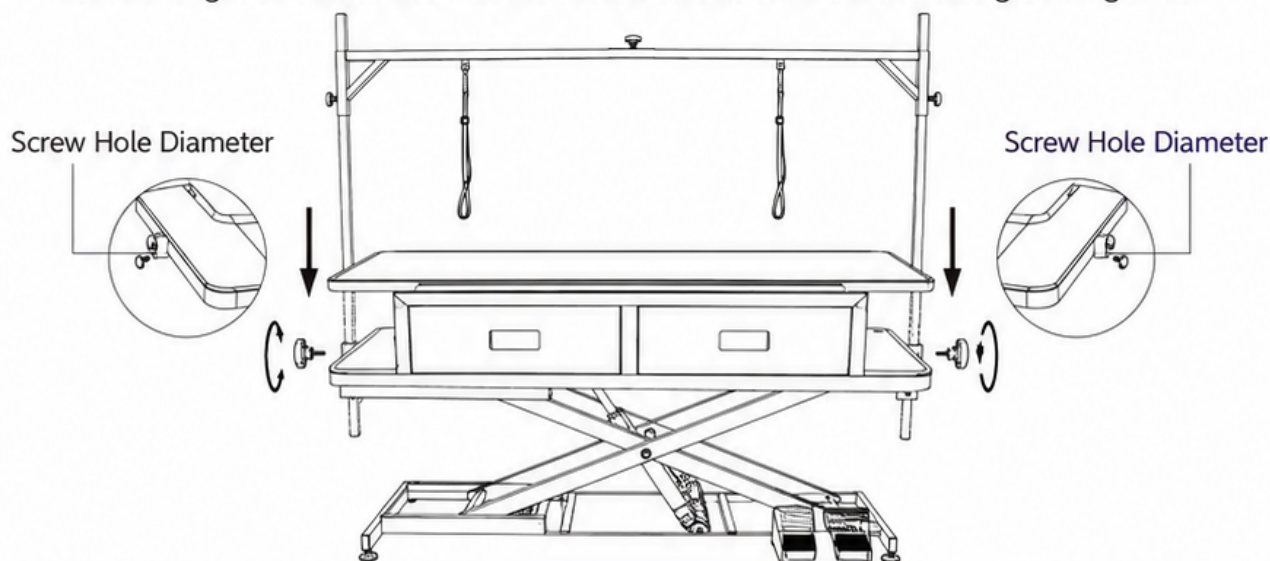


Installation instructions

- 4 Snap-in Nylon Neck Harness, can be locked to the hole above the grooming arm, used to control the pets during the grooming process.

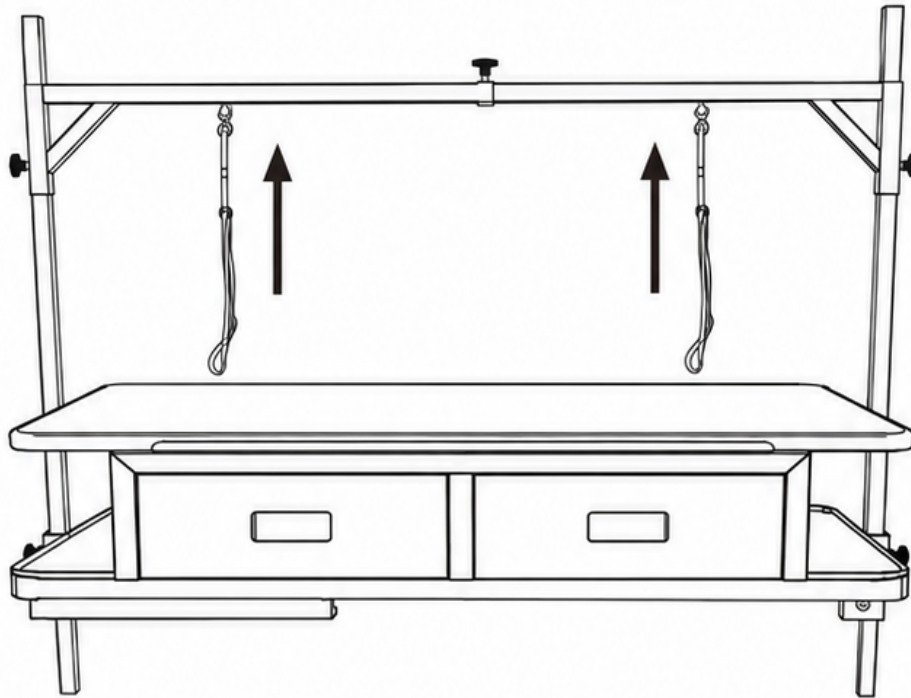


Adjustable Feet Installation Method As Follows:


Install the adjustable feet in the proper position of the base and lock them tightly.

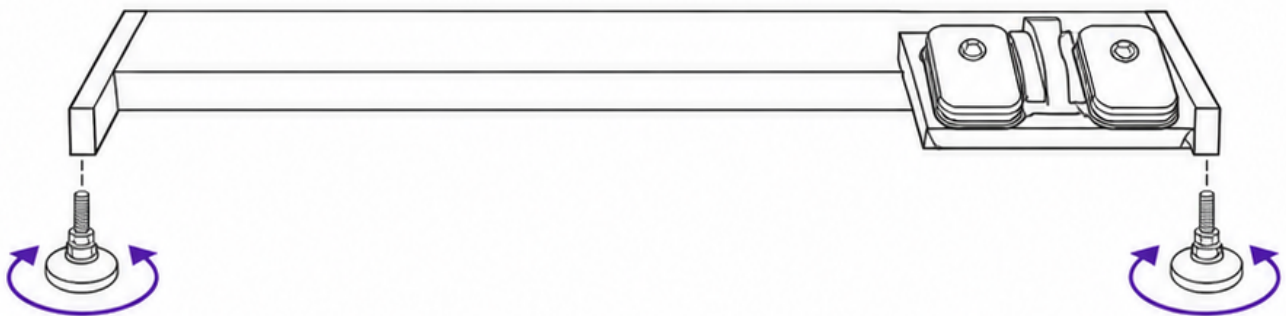

Parameter

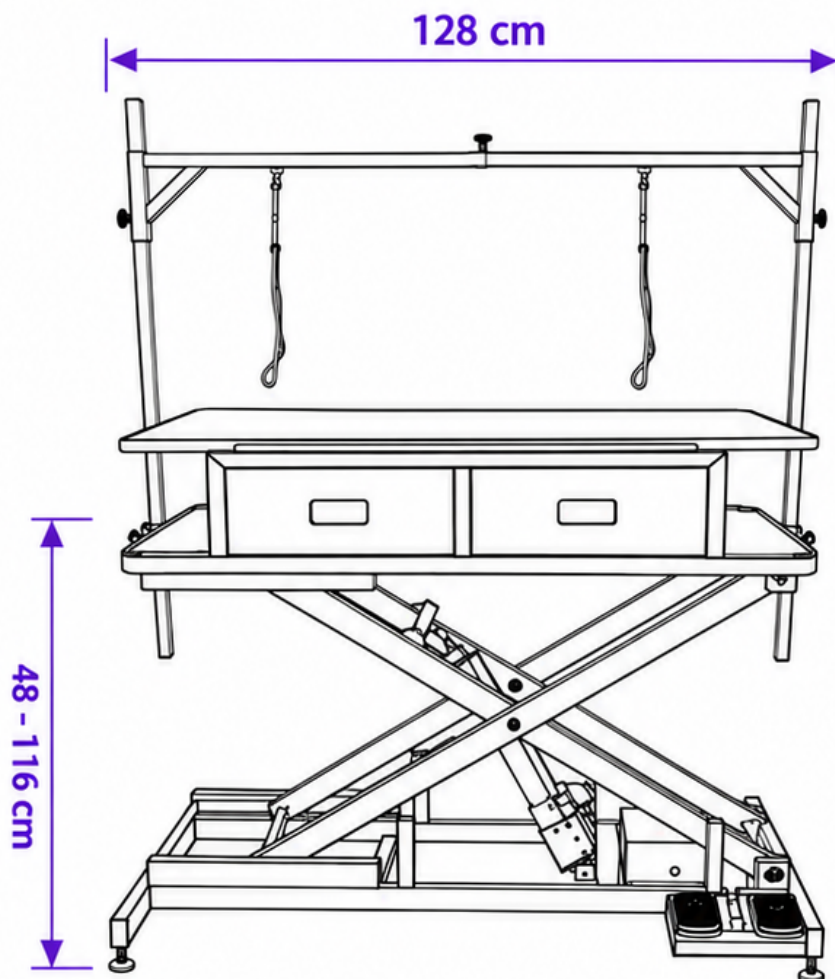

Front view

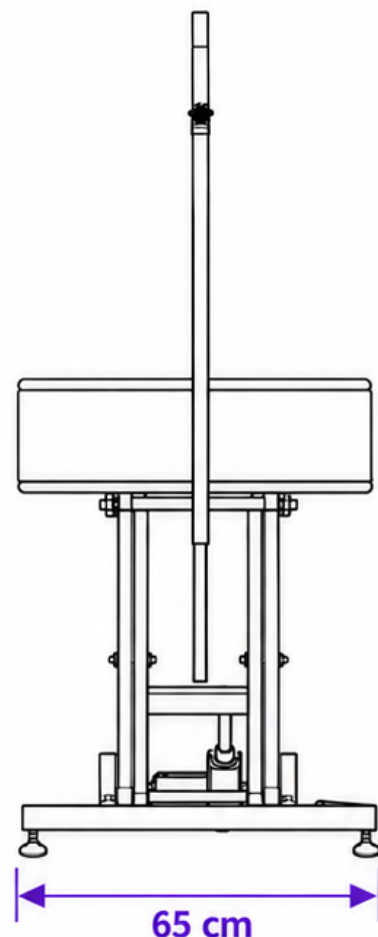

Side view


Model: GWFT-818

Net weight(kg)	76	Gross weight(kg)	81
Voltage	230V AC, 50Hz	CBM	0.40
Product dimensions (cm)	128×65×48-116	Package dimensions (cm)	131.5×69.5×44H

GWFT-818


Instructions for use

The storage space of four drawers.

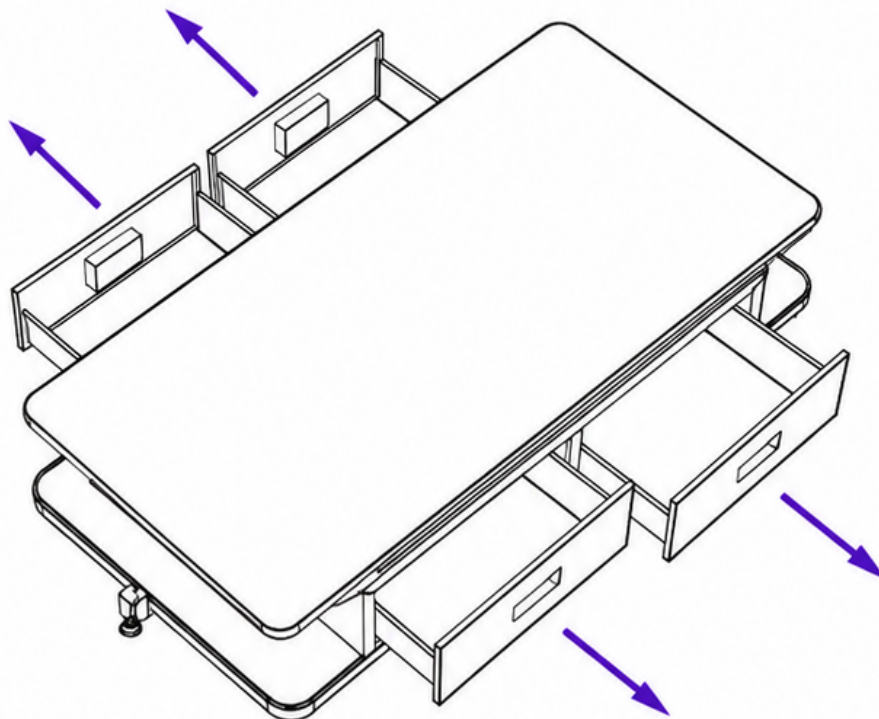


Adjust the leverer as below:

Rotate the leverer to a suitable height

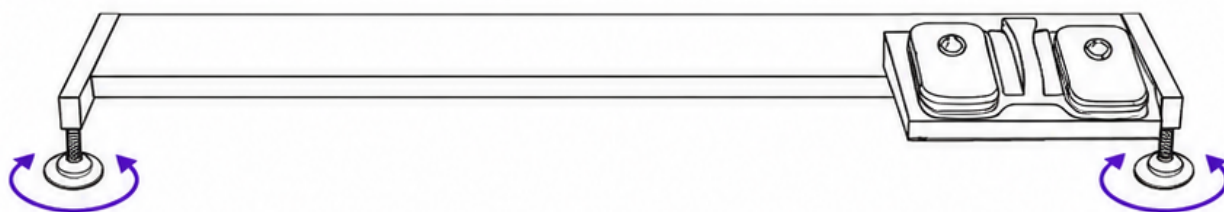

Instruction of foot pedal as below:

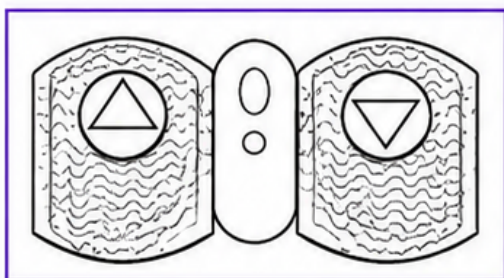

Stepping on the pedal to lift up



Stepping on the pedal to go down

SAFETY & OPERATING INSTRUCTIONS

ELECTRIC GROOMING TABLE – MODEL GWFT-818



Please read and follow these instructions carefully before using this product.

Keep this manual for future reference. Failure to follow these instructions can lead to serious injury or death, damage to the equipment or invalidate the warranty.

1 GENERAL SAFETY & OPERATION

- This appliance is intended solely for professional dog grooming. It must not be used for lifting people or for any other purpose.
- This appliance may only be operated by trained professionals aged 18 years or over. Children must not operate or play with the equipment.
- Do not exceed the maximum load capacity of 100 kg (220 lbs) when using the table. Ensure the dog is positioned centrally at all times.
- Only one dog may be placed on the table at a time.
- Ensure all four drawers are fully closed before operating the table. Do not operate the table with drawers open or partially open.
- The drawers are for storage of grooming tools and accessories only. They are not designed for animals, people to sit or stand on, or to be used as a step.
- Do not stand, sit, step or climb on the table, drawers or base. Do not use the open drawers as a step or support.
- Before loading, adjust the table to a suitable height for safe loading. Carefully place the dog onto the table, ensuring it is securely positioned and supervised at all times.
- Ensure the dog remains centrally positioned on the tabletop during operation.
- Once grooming is complete, lower the table to a safe height for removal. Carefully remove the dog from the table and switch off the power supply once the desired height is reached.
- Avoid unnecessary or continuous operation of the lifting mechanism.
- Ensure the dog is kept clear of the lifting mechanism and other moving components at all times. Do not allow dogs to be beneath or near the lifting mechanism during operation.
- Ensure the unit is installed on a stable, level surface and that all components are correctly assembled prior to use.
- Ensure all electrical connections are protected by an IP66-rated socket and a suitable waterproof cover when operating.
- Keep electrical components, including plugs, sockets, controls and cables, protected from water ingress at all times. Do not allow water to come into contact with these parts.
- Do not connect the appliance to an overloaded circuit or shared outlet where this may present a risk.
- Do not allow any person to sit, stand, climb or lean on the table or drawers.
- Inspect all structural components, including welding points on the lifting frame, before each use to ensure there are no signs of damage, cracking or fatigue; do not operate the appliance if any defects are identified.
- Inspect painted surfaces regularly, and any damaged or chipped paintwork must be restored immediately to prevent corrosion.
- Always ensure the surrounding area and floor are clean, dry, well-lit and free from obstacles before use to reduce the risk of slips, trips or electrical hazards.
- Keep hands, feet and other body parts clear of moving parts, as this may result in crushing or pinching injuries.
- Never leave a dog unattended on the table and maintain supervision at all times during operation.
- Do not use the equipment if the power cable, plug, transformer, actuator or foot pedal is damaged.
- Do not tamper with, interfere with, or attempt to access internal electrical components. Do not insert, poke or prod objects into any openings, controls or electrical parts of the appliance.
- Do not operate the lifting mechanism continuously for more than 2 minutes. Allow a minimum rest period of 18 minutes between cycles to prevent overheating.
- Always use appropriate restraints where necessary to ensure the safety of the dog.

2 CLEANING, MAINTENANCE & FAULTS

- Disconnect the appliance from the power supply when not in use and at the end of each working day.
- Disconnect from the power supply before cleaning, inspection or maintenance.
- Clean using a dry or slightly damp cloth only. Do not use corrosive, abrasive or solvent-based cleaning agents.
- Do not use water to clean electrical components, including the controller, foot pedal or actuator, due to risk of electric shock.
- Regularly inspect the appliance to ensure it remains in safe working condition. All repairs must be approved by Groomers World.
- In the event of abnormal operation, stop use immediately, isolate the appliance from the power supply and do not attempt to repair or disassemble the unit. Contact info@groomersworld.co.uk for further assistance.
- Do not modify the equipment in any way. Use only Groomers World approved parts and accessories.
- Ensure all safety labels remain present, clean and clearly legible at all times; if not, contact us at info@groomersworld.co.uk.
- The expected service life of this appliance is 3 years under normal use and maintenance.

3 WARRANTY EXCLUSIONS

This warranty does not cover faults or damage caused by misuse, neglect, accidental damage, failure to follow instructions, unauthorised repairs or modifications, normal wear and tear, unsuitable operating conditions, improper maintenance, transportation damage after delivery, or use of non-approved parts or accessories. This warranty does not affect your statutory rights under UK consumer law.

4 LIMITATION OF LIABILITY

To the fullest extent permitted by law, the supplier shall not be liable for any indirect or consequential loss, including loss of profits, revenue, goodwill, or third-party claims. Nothing in this warranty excludes or limits liability for death or personal injury caused by negligence, fraud or fraudulent misrepresentation, or any liability that cannot be excluded under UK law.



Do not use this device in a bathtub, shower, or water-filled reservoir.

WARNING: Do not use this appliance near bathtubs, showers, basins or other vessels containing water.



This marking indicates that this product should not be disposed of with other household waste throughout the UK. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources.




For the latest product information and updated manuals, please visit: www.groomersworld.co.uk

For warranty support, please contact: info@groomersworld.co.uk

GRMERS WORLD **PRO**

PRODUCT INFORMATION & COMPLIANCE

GW Equipment Ltd		Electric Grooming Table – Model GWFT-818	
Name	Pet Grooming Table	Weight GW / NW	76 / 81 kg
Model	GWFT-818	Input	230V~50Hz
Size	128*65*48-116H cm	Max Power	50W
Lifting Height	48-116 cm	Output	24V =, Max 2.0A
Static Load	90 kg	Manuf No	
Lifting Weight	100 kg	Manuf Date	

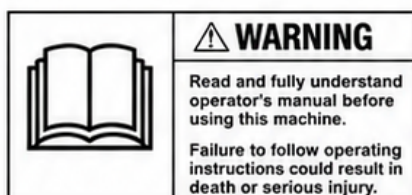

UK
CA

CE



MADE IN CHINA

GW Equipment Ltd., Unit 11 Sunflag Business Park, DH11TN Durham
info@groomersworld.co.uk



PLEASE RETAIN THIS MANUAL FOR FUTURE REFERENCE.

The product identification label contains important model, rating and manufacturer information and must remain attached and legible.

For product support, servicing, replacement parts or safety enquiries,
please contact Groomers World.

GW Equipment Ltd

Unit 11 Sunflag Business Park
Durham, DH11TN, United Kingdom

✉ info@groomersworld.co.uk

🌐 www.groomersworld.co.uk